

Hall Effect Current Sensors S23P***D15M2 Series

Features:

- Closed Loop type
- Current or voltage output
- Conversion ratio K = 1:2000
- Printed circuit board mounting
- Integrated primary
- Improved dv/dt immunity
- Insulated plastic case according to UL94V0

Advantages:

- Excellent accuracy and linearity
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity to external interferences
- Optimised response time
- Current overload capability



Specifications


$T_A=25^{\circ}\text{C}$, $V_{CC}=\pm 15\text{V}$

| Parameters | Symbol | S23P50/100D15M2 | |
|--|----------------|--|--|
| Rated Current | I_f | 50A | 100A |
| Maximum Current ¹ | I_{fmax} | $\pm 110\text{A}$ (@ $R_M \leq 71\Omega$) | $\pm 160\text{A}$ (@ $R_M \leq 25\Omega$) |
| Measuring resistance $I_f = \pm A_{DC}$ @ 85°C | R_M | $0\Omega \sim 217\Omega$ @ $V_{CC} = \pm 12\text{V}$ $0\Omega \sim 327\Omega$ @ $V_{CC} = \pm 15\text{V}$ | $0\Omega \sim 57\Omega$ @ $V_{CC} = \pm 12\text{V}$ $45\Omega \sim 114\Omega$ @ $V_{CC} = \pm 15\text{V}$ |
| Conversion Ratio | K | 1 : 2000 | 1 : 2000 |
| Output Current | I_{OUT} | $\pm 25\text{mA}$ | $\pm 50\text{mA}$ |
| Offset Current | I_{OE} | $\pm 0.15\text{mA}$ @ $I_f = 0\text{A}$ | |
| Output Current Accuracy | X | $I_{OUT} \pm 0.25\%$ | |
| Output Linearity | ϵ_L | $\pm 0.15\%$ @ I_f | |
| Supply Voltage ² | V_{CC} | $\pm 12\text{V} \sim \pm 15\text{V} \pm 5\%$ | |
| Consumption Current | I_{CC} | $\pm 16\text{mA}$ (Output Current is not included) | |
| Response Time | t_r | $< 0.5\mu\text{s}$ @ $di/dt = 100\text{A} / \mu\text{s}$ | |
| Output Temperature Characteristic | $T_{CI_{OUT}}$ | $\pm 0.01\% / ^{\circ}\text{C}$ @ I_f | |
| Offset Temperature Characteristic | $T_{CI_{OE}}$ | $< \pm 0.5\text{mA}$ typ. @ $I_f = 0\text{A}$ ($-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$) | |
| Hysteresis allowance | I_{OH} | $\leq 0.3\text{mA}$ ($0\text{A} \Leftrightarrow I_f$) | |
| Insulation Withstanding | V_d | AC5000V, for 1minute (sensing current 0.5mA), Primary \leftrightarrow Secondary | |
| Insulation Resistance | R_{IS} | $> 500\text{M}\Omega$ (@ DC500V) Primary \leftrightarrow Secondary | |
| Frequency Bandwidth | f | DC .. 200 kHz | |
| Secondary Coil Resistance | R_S | 115Ω @ $T_A = 70^{\circ}\text{C}$ 121Ω @ $T_A = 85^{\circ}\text{C}$ | |
| Operating Temperature | T_A | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ | |
| Storage Temperature | T_S | $-40^{\circ}\text{C} \sim +90^{\circ}\text{C}$ | |


¹ @ $V_{CC}=\pm 15\text{V}$ for 10 Seconds — ² Rated Current is restricted by V_{CC}

Electrical Performances

Frequency Characteristic

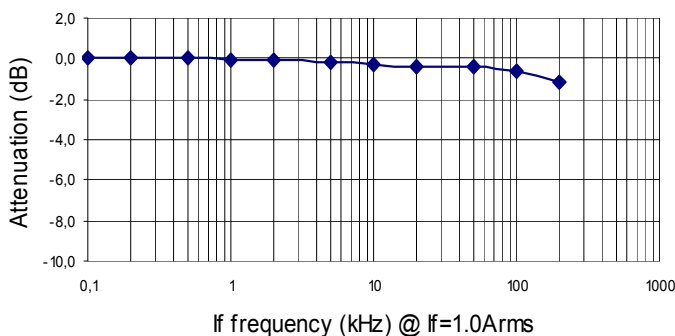


Saturation Characteristic ($R_M=100\Omega$)

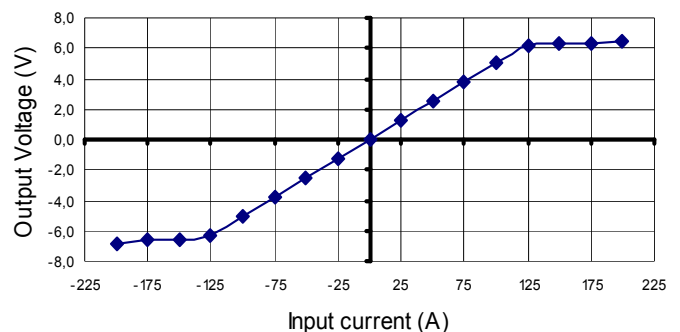


Hall Effect Current Sensors S23P***D15M2 Series

Mechanical dimensions in mm

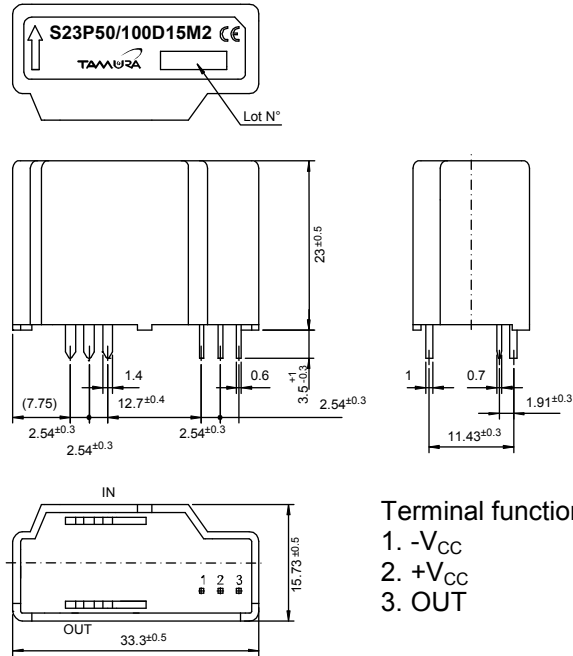

Electrical connection diagram

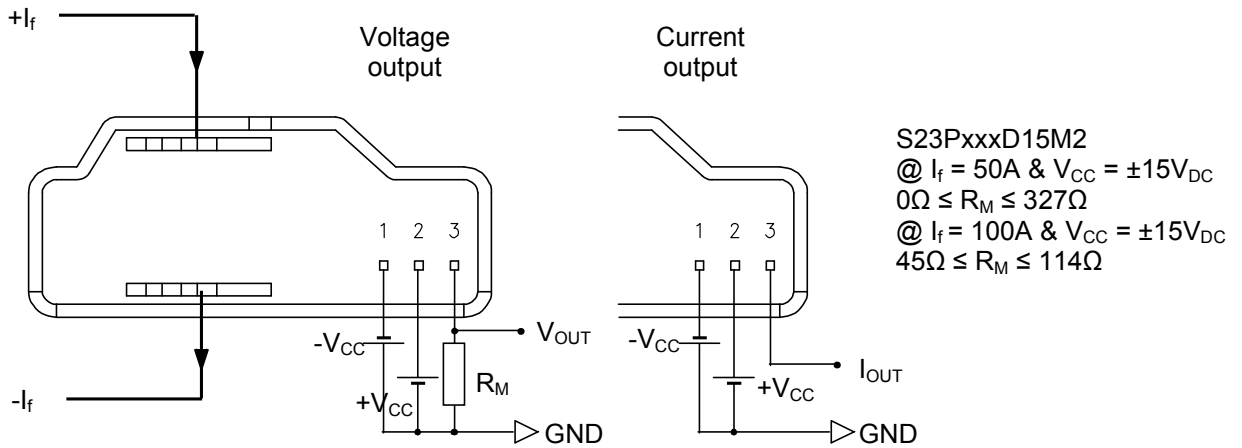

Package & Weight Information

| Weight | Pcs/box | Pcs/carton | Pcs/pallet |
|--------|---------|------------|------------|
| 26g | 100 | 100 | 2400 |